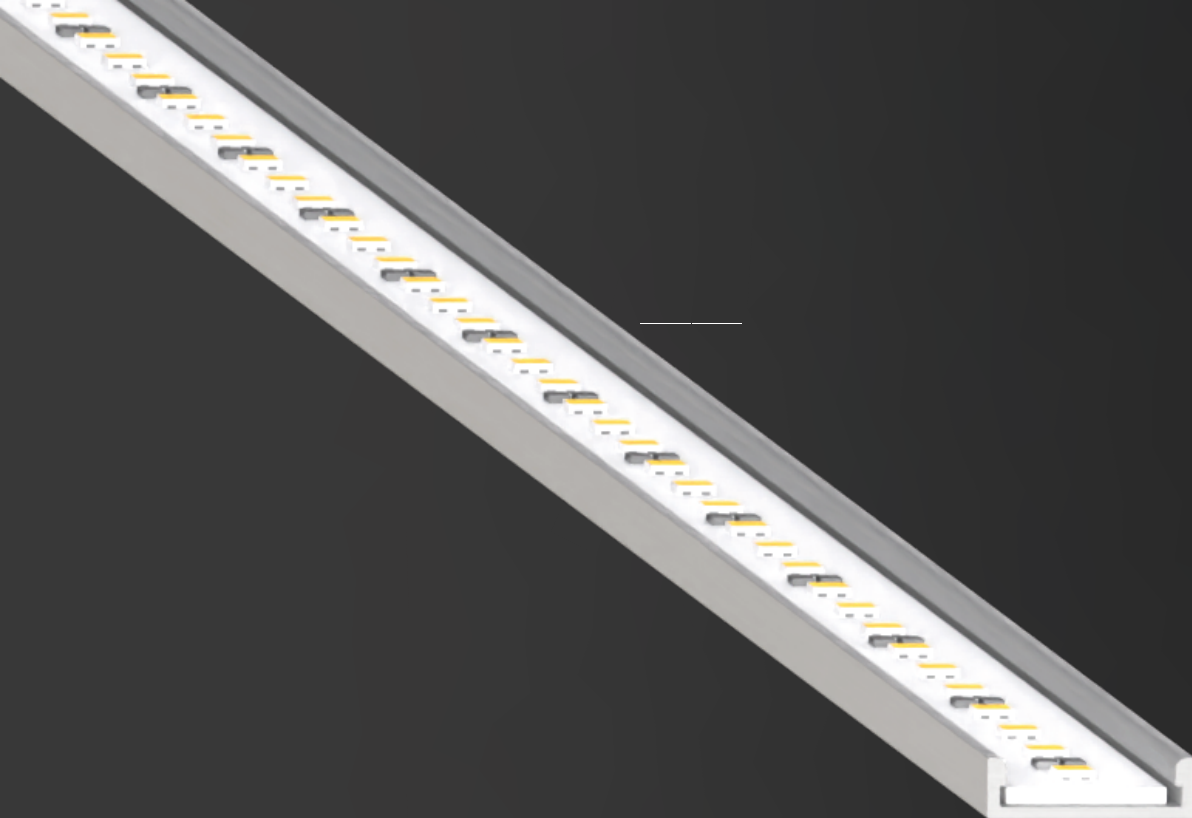




BA21
LED Bar
Surface Mounted



SURFACE



CE



PROTECT.



CLASS III



Ta



MADE IN
TÜRKIYE

HOUSING

Electrostatic powder paint coated extruded aluminum housing
IP40 Protection
Electrical Safety Class III

Body Color Options



9006
Gray

OPTIC

PC Diffuser
IEC/EN 62471 Photo-Biologic Protection RG0
UGR (CIE Pub.117):21

Optic Options



120°

LED

SMD LED with a minimum lifetime of 100.000 hours
High color rendering (CRI>80)

Color Rendering Index



Ra>80

CCT



2700K



3000K



4000K



5000K



5700K



6500K



Blue



Green



Red



Amber

CONTROL

Rated Input Voltage
Range of Input Voltage
Frequency
Power Factor
Operating Temperature
Constant Current LED Driver

220~240VAC
198~264VAC
50~60Hz
PF>0.95
-20°C ~ +50°C
Over Current Protection (OCP), Over Voltage Protectio (OVP),
Short Circuit Protection (SCP), Over Temperature Protection (OTP)

Additional Features



INPUT



INPUT

STANDARDS



Luminaire Standarts
Driver Standarts

EN 60598-1 - EN 60598-2-1
-

BA21

LED Bar

Surface Mounted

 BA21-AU10 60 LED/m	 5mm 14,8mm 1000mm	Power	Lum. Flux	Efficiency	Packaging Sizes	
		14W	- lm	- lm/W	Width	- cm
 BA21-BU10 120 LED/m	 5mm 14,8mm 1000mm	Power	Lum. Flux	Efficiency	Packaging Sizes	
		14W	- lm	- lm/W	Length	- cm
 BA21-CU10 168 LED/m	 5mm 14,8mm 1000mm	Power	Lum. Flux	Efficiency	Packaging Sizes	
		14W	- lm	- lm/W	Height	- cm
 BA21-DU10 72 LED/m	 5mm 14,8mm 1000mm	Power	Lum. Flux	Efficiency	Packaging Sizes	
		14W	- lm	- lm/W	Amount per ctn.	- pcs.
					Ctn. weight	- kg
					Deci	-

**The specified luminous flux values may vary by %10.

ORDER CODE EXPENSION

BA21- BU10- 014 - 8 65 S - IPPU- 0120- 2 X X S 65												
GROUP CODE	BODY CODE	POWER	CRI	CCT	EFFICIENCY	BODY COLOR	OPTIC	CONTROL	DRIVER	KIT	ACSESSORY	IP
BA21	AU10 BU10 CU10 DU10	014: 14W	8: 80	27: 2700K 30: 3000K 40: 4000K 65: 6500K MB: Amber RD: Red GR: Green BL: Blue	S: Standart H: Yüksek	IPPU: Poliüretan	0120: 120°	1: 12V 2: 24V			S: Standart K: İki Uç Kablolu W: IP65 Soketli	65: IP65