



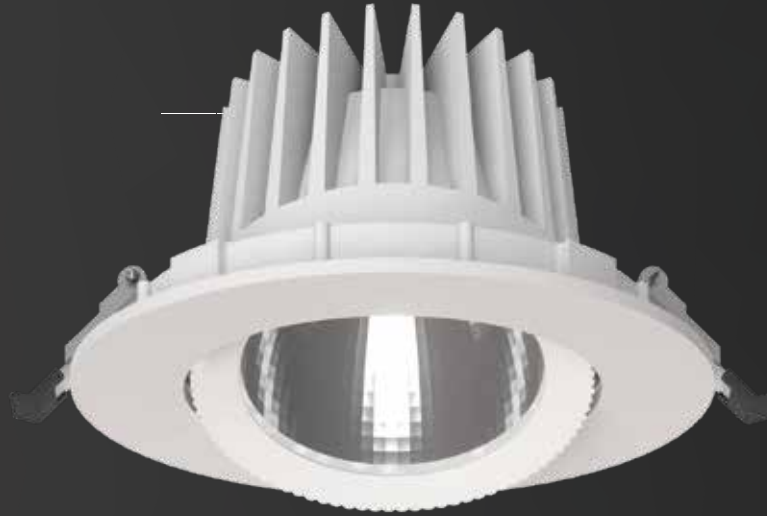

DC10

COB Downlight LED Lighting

Round Recessed



HOUSING

Electrostatic powder paint coated die cast aluminum housing
IP20 Protection
Electrical Safety Class II


Body Color Options



OPTIC

Aluminium Reflector
UGR (CIE Pub.117):11
IEC/EN 62471 Photo-Biologic Protection RG0

Optic Options



LED

COB LED with a minimum lifetime of 100.000 hours
High color rendering (CRI>80)

Color Rendering Index

80⁺
Ra>80

CCT




CONTROL

Rated Input Voltage
Range of Input Voltage
Frequency
Power Factor
Operating Temperature
Constant Current LED Driver

220~240VAC
176~264 VAC
50~60Hz
PF>0.60 (P≤25W) / PF>0.95 (P≥25W)
-20°C ~ +50°C
Over Current Protection (OCP), Over Voltage Protectio (OVP),
Short Circuit Protection (SCP), Over Temperature Protection (OTP)

Additional Features



STANDARDS


Luminaire Standarts
Driver Standarts


EN 60598-1 - EN 60598-2-2
LVD (EN 61347-1, EN 61347-2-13)
EMC (EN 55015, EN 61547, EN 61000-3-2/3-3)


DC10


COB Downlight LED Lighting

Round Recessed

		<table><tr><th>Power</th><th>Lum. Flux</th><th>Efficiency</th></tr><tr><td>8W</td><td>909 lm</td><td>108 lm/W</td></tr><tr><td>GU10</td><td>- lm</td><td>- lm/W</td></tr></table>	Power	Lum. Flux	Efficiency	8W	909 lm	108 lm/W	GU10	- lm	- lm/W	<table><tr><th colspan="2">Packaging Sizes</th></tr><tr><td>Width</td><td>- cm</td></tr><tr><td>Length</td><td>- cm</td></tr><tr><td>Height</td><td>- cm</td></tr><tr><td>Amount per ctn.</td><td>- pcs.</td></tr><tr><td>Ctn. weight</td><td>- kg</td></tr><tr><td>Deci</td><td>-</td></tr></table>	Packaging Sizes		Width	- cm	Length	- cm	Height	- cm	Amount per ctn.	- pcs.	Ctn. weight	- kg	Deci	-
Power	Lum. Flux	Efficiency																								
8W	909 lm	108 lm/W																								
GU10	- lm	- lm/W																								
Packaging Sizes																										
Width	- cm																									
Length	- cm																									
Height	- cm																									
Amount per ctn.	- pcs.																									
Ctn. weight	- kg																									
Deci	-																									
DC10-0110																										

		<table><tr><th>Power</th><th>Lum. Flux</th><th>Efficiency</th></tr><tr><td>20W</td><td>2029 lm</td><td>101 lm/W</td></tr></table>	Power	Lum. Flux	Efficiency	20W	2029 lm	101 lm/W	<table><tr><th colspan="2">Packaging Sizes</th></tr><tr><td>Width</td><td>- cm</td></tr><tr><td>Length</td><td>- cm</td></tr><tr><td>Height</td><td>- cm</td></tr><tr><td>Amount per ctn.</td><td>- pcs.</td></tr><tr><td>Ctn. weight</td><td>- kg</td></tr><tr><td>Deci</td><td>-</td></tr></table>	Packaging Sizes		Width	- cm	Length	- cm	Height	- cm	Amount per ctn.	- pcs.	Ctn. weight	- kg	Deci	-
Power	Lum. Flux	Efficiency																					
20W	2029 lm	101 lm/W																					
Packaging Sizes																							
Width	- cm																						
Length	- cm																						
Height	- cm																						
Amount per ctn.	- pcs.																						
Ctn. weight	- kg																						
Deci	-																						
DC10-0140																							

		<table><tr><th>Power</th><th>Lum. Flux</th><th>Efficiency</th></tr><tr><td>30W</td><td>3423 lm</td><td>109 lm/W</td></tr></table>	Power	Lum. Flux	Efficiency	30W	3423 lm	109 lm/W	<table><tr><th colspan="2">Packaging Sizes</th></tr><tr><td>Width</td><td>- cm</td></tr><tr><td>Length</td><td>- cm</td></tr><tr><td>Height</td><td>- cm</td></tr><tr><td>Amount per ctn.</td><td>- pcs.</td></tr><tr><td>Ctn. weight</td><td>- kg</td></tr><tr><td>Deci</td><td>-</td></tr></table>	Packaging Sizes		Width	- cm	Length	- cm	Height	- cm	Amount per ctn.	- pcs.	Ctn. weight	- kg	Deci	-
Power	Lum. Flux	Efficiency																					
30W	3423 lm	109 lm/W																					
Packaging Sizes																							
Width	- cm																						
Length	- cm																						
Height	- cm																						
Amount per ctn.	- pcs.																						
Ctn. weight	- kg																						
Deci	-																						
DC10-0160																							

		<table><tr><th>Power</th><th>Lum. Flux</th><th>Efficiency</th></tr><tr><td>40W</td><td>4162 lm</td><td>99 lm/W</td></tr></table>	Power	Lum. Flux	Efficiency	40W	4162 lm	99 lm/W	<table><tr><th colspan="2">Packaging Sizes</th></tr><tr><td>Width</td><td>- cm</td></tr><tr><td>Length</td><td>- cm</td></tr><tr><td>Height</td><td>- cm</td></tr><tr><td>Amount per ctn.</td><td>- pcs.</td></tr><tr><td>Ctn. weight</td><td>- kg</td></tr><tr><td>Deci</td><td>-</td></tr></table>	Packaging Sizes		Width	- cm	Length	- cm	Height	- cm	Amount per ctn.	- pcs.	Ctn. weight	- kg	Deci	-
Power	Lum. Flux	Efficiency																					
40W	4162 lm	99 lm/W																					
Packaging Sizes																							
Width	- cm																						
Length	- cm																						
Height	- cm																						
Amount per ctn.	- pcs.																						
Ctn. weight	- kg																						
Deci	-																						
DC10-0185																							

**The specified luminous flux values may vary by %10.

ORDER CODE EXPENSION

DC10- 0190 - 020 - 8 40 S - 9016-0030- O S S S 20												
GROUP CODE	BODY CODE	POWER	CRI	CCT	EFFICIENCY	BODY COLOR	OPTIC	CONTROL	DRIVER	KIT	V	IP
DC10	0110	008: 8W	8: 80	27: 2700K	S: Standart	9016: White	0015: 15°	O: ON-OFF D: DALI	S: LAMPTIME E: Other	S: Standart 3: 3 Hours Kit		20: IP20
	0140	020: 20W		30: 3000K		9006: Gray	0030: 30°					
	0160	030: 30W		40: 4000K		9005: Black	0045: 45°					
	0185	040: 40W		65: 6500K								