



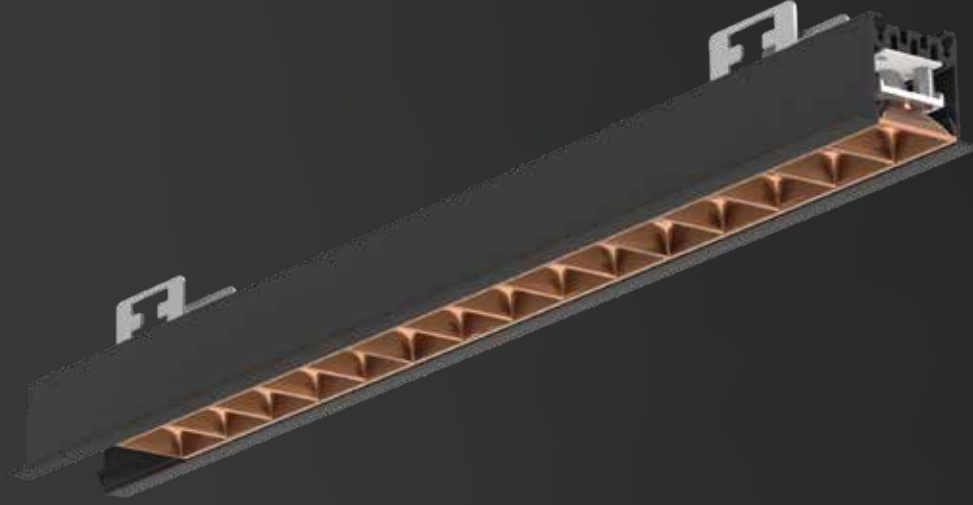

LR10

Linear LED Lighting With Lens


Recessed 33x35



HOUSING

Electrostatic powder paint coated extruded aluminum housing
IP20 Protection
Electrical Safety Class I

Body Color Options




OPTIC

UGR (CIE Pub.117):21
IEC/EN 62471 Photo-Biologic Protection RG0

Optic Options



Reflector Colors

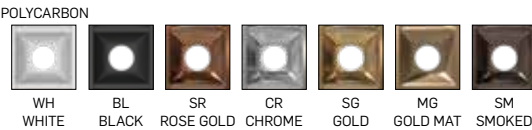

LED

SMD LED with a minimum lifetime of 100.000 hours
High color rendering (CRI>80)

Color Rendering Index



CCT



CONTROL

Rated Input Voltage	220~240VAC
Range of Input Voltage	176~264VAC
Frequency	50~60Hz
Power Factor	PF>0.95
Operating Temperature	-20°C ~ +50°C
Constant Current LED Driver	Over Current Protection (OCP), Over Voltage Protectio (OVP), Short Circuit Protection (SCP), Over Temperature Protection (OTP)

Additional Features



STANDARDS

Luminaire Standarts	EN 60598-1 - EN 60598-2-2
Driver Standarts	LVD (EN 61347-1, EN 61347-2-13) EMC (EN 55015, EN 61547, EN 61000-3-2/3-3)


LR10

Linear LED Lighting With Lens

Recessed 33x35



LR10-KNKP




Power	Lum. Flux	Efficiency
-	-	-

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weighth	- kg
Deci	-



LR10-D1MD



Power	Lum. Flux	Efficiency
30W/m	1084 lm	36 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weighth	- kg
Deci	-



LR10-L1MD



Power	Lum. Flux	Efficiency
5W	565 lm	96 lm/W
10W	1051 lm	108 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weighth	- kg
Deci	-

**The specified luminous flux values may vary by %10.

ORDER CODE EXPENSION

LR10-L1MD- 010 - 8 40 S - 9005-MGPC76- 0 S S S 20

GROUP CODE	BODY CODE	POWER	CRI	CCT	EFFICIENCY	BODY COLOR	OPTIC	CONTROL	DRIVER	KIT	ACSESSORY	IP
LR10	KNKP D1MD L1MD	005: 5W 010: 10W 030: 30W	8: 80	27: 2700K 30: 3000K 40: 4000K 65: 6500K	S: Standart	9016: White 9006: Gray 9005: Black	WHXX: White BLXX: Black SRXX: Rose Gold CRXX: Chrome SGXX: Gold MGXX: Gold Mat SMXX: Smoked PC76	O: ON-OFF	S: LAMPTIME	S: Standart	S: Standart	20: IP20