



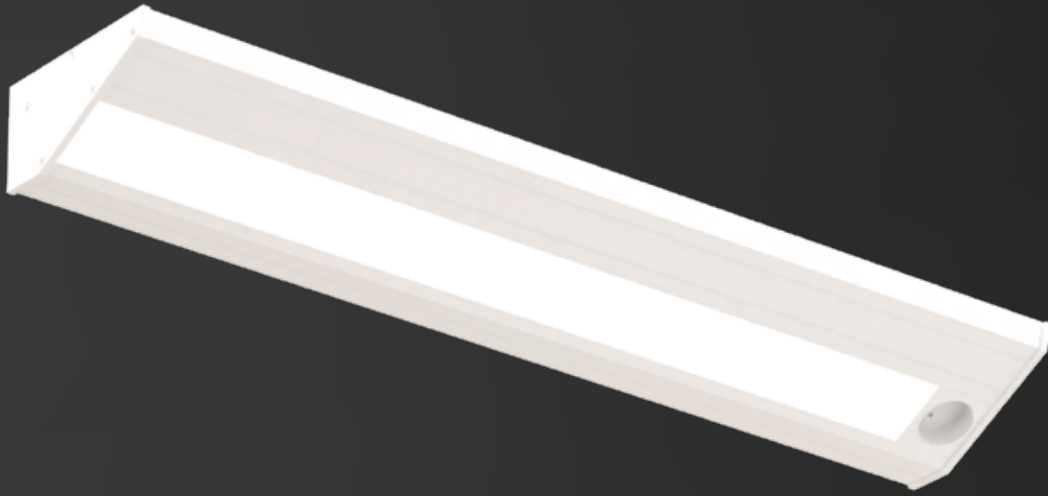

LW12

Linear LED Lighting


Under Counter



HOUSING

Electrostatic powder paint coated extruded aluminum housing
IP20 Protection
Electrical Safety Class I

Body Color Options



OPTIC

PC diffuser with high transmissivity
UGR (CIE Pub.117):21
IEC/EN 62471 Photo-Biologic Protection RG0

Optic Options



LED

SMD LED with a minimum lifetime of 100.000 hours
High color rendering (CRI>80)

Color Rendering Index



CCT




CONTROL

Rated Input Voltage
Range of Input Voltage
Frequency
Power Factor
Operating Temperature
Constant Current LED Driver

220~240VAC
176~264VAC
50~60Hz
PF>0.95
-20°C ~ +50°C
Over Current Protection (OCP), Over Voltage Protectio (OVP),
Short Circuit Protection (SCP), Over Temperature Protection (OTP)




Additional Features



STANDARDS

Luminaire Standarts
Driver Standarts
EN 60598-1 - EN 60598-2-1
LVD (EN 61347-1, EN 61347-2-13)
EMC (EN 55015, EN 61547, EN 61000-3-2/3-3)

LW12
Linear LED Lighting
Under Counter

 LW12-0030			Power	Lum. Flux	Efficiency	Packaging Sizes	
			9W	274 lm	32 lm/W	Width	- cm
 LW12-0060			Power	Lum. Flux	Efficiency	Packaging Sizes	
			18W	498 lm	26 lm/W	Width	- cm
 LW12-0090			Power	Lum. Flux	Efficiency	Packaging Sizes	
			27W	752 lm	29 lm/W	Width	- cm

**The specified luminous flux values may vary by %10.

ORDER CODE EXPENSION

LW12- 0060 - 018 - 8													40	S	- 9005- 0120 - 0	S	S	S	20
GROUP CODE	BODY CODE	POWER	CRI	CCT	EFFICIENCY	BODY COLOR	OPTIC	CONTROL	DRIVER	KIT	ACSESSORY	IP							
LW12	0060	09: 9W	8: 80	27: 2700K	S: Standart	9016: White	0120: 120°	0: ON-OFF	S: LAMPTIME	S: Standart	S: Standart	20: IP20							
	0090	018: 18W		30: 3000K		9006: Gray													
	0120	027: 27W		40: 4000K		9005: Black													
				65: 6500K															