




ML10

Magnet LED Lighting

With Diffuser

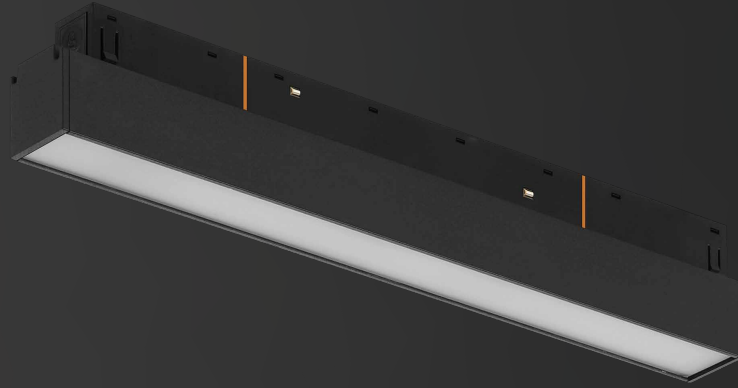

TRACK



CE



VOLTAGE



PROTECT.



CLASS III



Ta



MADE IN
TÜRKİYE

HOUSING

Electrostatic powder paint coated extruded aluminum housing
IP20 Protection
Electrical Safety Class III

Body Color Options



9005
Black

OPTIC

PS Diffuser
UGR (CIE Pub.117):11
IEC/EN 62471 Photo-Biologic Protection RG0

Optic Options



120°

LED

SMD LED with a minimum lifetime of 100.000 hours
High color rendering index (CRI>80)

Color Rendering Index



Ra>80

CCT



2700K



3000K



4000K



5000K



5700K



6500K

CONTROL

Rated Input Voltage 48VDC
Range of Input Voltage -
Frequency -
Power Factor -
Operating Temperature -20°C ~ +50°C
Constant Current LED Driver

Additional Features



ON/OFF



DIM



TW+DIM

Overload Protection (OLP), Overvoltage Protection (OVP),
Short Circuit Protection (SCP), Over Temperature Protection (OTP)


STANDARDS

Luminaire Standarts EN 60598-1 - EN 60598-2-1
Driver Standarts -


ML10

Magnet LED Lighting

With Diffuser



ML10-SD30




Power	Lum. Flux	Efficiency
12W	- lm	- lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weighth	- kg
Deci	-



ML10-SD60




Power	Lum. Flux	Efficiency
24W	1844 lm	73 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weighth	- kg
Deci	-



ML10-SD90



Power	Lum. Flux	Efficiency
36W	3133 lm	85 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weighth	- kg
Deci	-

**The specified luminous flux values may vary by %10.

ORDER CODE EXPENSION

ML10- SD60- 024 - 8 40 S - 9005-0120 - O S S S 20

GROUP CODE	BODY CODE	POWER	CRI	CCT	EFFICIENCY	BODY COLOR	OPTIC	CONTROL	DRIVER	KIT	ACCESSORY	IP
ML10	SD30 SD60 SD90	012: 12W 024: 24W 036: 36W	8: 80	27: 2700K 30: 3000K 40: 4000K 65: 6500K	S: Standart	9005: Black	0120: 120°	0: ON-OFF D: DALI W: Smart TW	S: LAMPTIME	S: Standart	S: Standart	20: IP20