




OW13

IP67 Wallwasher

LED Lighting

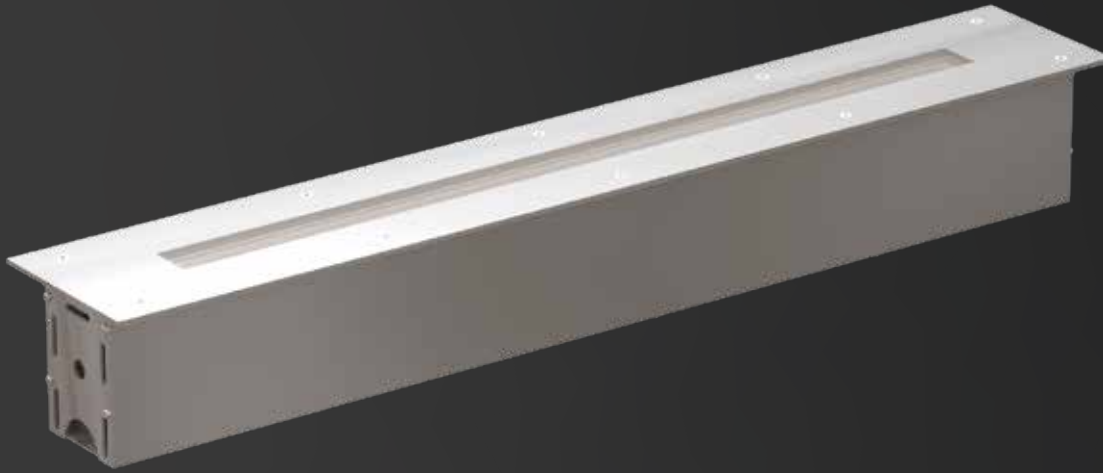

HOUSING

Electrostatic powder paint coated extruded aluminum housing
IP67 Protection
IK08 Impact Protection
Electrical Safety Class I


Body Color Options



OPTIC

PMMA Lens
UGR (CIE Pub.117):9
IEC/EN 62471 Photo-Biologic Protection RG0

Optic Options



LED

SMD LED with a minimum lifetime of 100.000 hours
High color rendering (CRI>870)

Color Rendering Index



CCT



CONTROL

Rated Input Voltage
Range of Input Voltage
Frequency
Power Factor
Operating Temperature
Constant Current LED Driver

220~240VAC
176~264VAC
50~60Hz
PF>0.95

-20°C ~ +50°C

Over Current Protection (OCP), Over Voltage Protectio (OVP),
Short Circuit Protection (SCP), Over Temperature Protection (OTP)

Additional Features



STANDARDS

Luminaire Standarts
Driver Standarts

EN 60598-1 - EN 60598-2-13
LVD (EN 61347-1, EN 61347-2-13)
EMC (EN 55015, EN 61547, EN 61000-3-2/3-3)


OW13

IP67 Wallwasher

LED Lighting



OW13-0028




Power	Lum. Flux	Efficiency
6W	699 lm	111 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weigth	- kg
Deci	-



OW13-0042




Power	Lum. Flux	Efficiency
12W	1406 lm	116 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weigth	- kg
Deci	-



OW13-0057




Power	Lum. Flux	Efficiency
18W	2388 lm	122 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weigth	- kg
Deci	-




OW13-0071




Power	Lum. Flux	Efficiency
24W	3157 lm	117 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weigth	- kg
Deci	-




OW13-0101




Power	Lum. Flux	Efficiency
36W	4616 lm	118 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weigth	- kg
Deci	-



OW13-0130



Power	Lum. Flux	Efficiency
48W	6585 lm	127 lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weigth	- kg
Deci	-

**The specified luminous flux values may vary by %10.


OW13

IP67 Wallwasher RGB

LED Lighting



OW13-R036




Power	Lum. Flux	Efficiency
9W	- lm	- lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weighth	- kg
Deci	-




OW13-R059




Power	Lum. Flux	Efficiency
18W	- lm	- lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weighth	- kg
Deci	-



OW13-R104



Power	Lum. Flux	Efficiency
36W	- lm	- lm/W

Packaging Sizes	
Width	- cm
Length	- cm
Heigth	- cm
Amount per ctn.	- pcs.
Ctn. weighth	- kg
Deci	-

**The specified luminous flux values may vary by %10.

ORDER CODE EXPENSION

OW13- 0130 - 036 - 8 40 S -S304-0060- 0 S S S 67

GROUP CODE	BODY CODE	POWER	CRI	CCT	EFFICIENCY	BODY COLOR	OPTIC	CONTROL	DRIVER	KIT	ACSESSORY	IP
OW13	0028: 28 cm 0042: 42 cm 0057: 57 cm 0071: 71 cm 0101: 101 cm 0130: 130 cm R036 R059 R104	006: 6W 009: 9W 012: 12W 018: 18W 024: 24W 036: 36W 048: 48W	8: 80	27: 2700K 30: 3000K 40: 4000K 65: 6500K MB: Amber RD: Red GR: Green BL: Blue	S: Standart	S304: Inox	0015: 15° 0030: 30° OV24: 15°-35° 0045: 45° 0060: 60°	O: ON-OFF	S: LAMPTIME	S: Standart	S: Standart	67: IP67