




PB10

Backlight Panel LED Lighting

Recessed Rockwool



HOUSING

Electrostatic powder paint coated metal housing
ABS housing
IP40 Protection
Electrical Safety Class II


Body Color Options



OPTIC

PS diffuser with high transmissivity
UGR (CIE Pub.117):21
IEC/EN 62471 Photo-Biologic Protection RG0

Optic Options



LED

SMD LED with a minimum lifetime of 100.000 hours
High color rendering index (CRI>80)

Color Rendering Index



CCT




CONTROL

Rated Input Voltage
Range of Input Voltage
Frequency
Power Factor
Operating Temperature
Constant Current LED Driver

220~240VAC
176~264 VAC
50~60Hz
PF>0.60 (P≤25W) / PF>0.95 (P≥25W)
-20°C ~ +50°C
Overload Protection (OLP), Overvoltage Protection (OVP),
Short Circuit Protection (SCP), Over Temperature Protection (OTP)

Additional Features




STANDARDS


Luminaire Standarts
Driver Standarts

EN 60598-1 - EN 60598-2-2
LVD (EN 61347-1, EN 61347-2-13)
EMC (EN 55015, EN 61547, EN 61000-3-2/3-3)


Recessed Rockwool

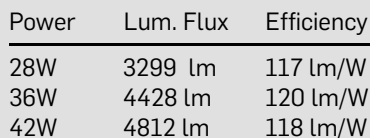


Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-



Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-



Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-



Packaging Sizes	
Width	- cm
Length	- cm
Height	- cm
Amount per ctn.	- pcs.
Ctn. weight	- kg
Deci	-

****The specified luminous flux values may vary by %10.**

PB10- 3060- 020 - 8 40 S -9016-PM76- 0 S S S 40

[illegible]